



...WHEN PERFORMANCE MATTERS

SuperPro Max 5W-30 Synthetic Blend Engine Oil

ILSAC GF-6 / API SN Plus, SN-RC

Pro Performance SuperPro Max Synthetic Blend delivers exceptional performance and protection for vehicles of all ages. Combining carefully selected conventional and synthetic base oils with our most robust additive package to date provides unmatched protection against **Low Speed Pre-Ignition** even in the most advanced turbo charged applications.

Pro Performance SuperPro Max utilizes this new additive technology to keep dirt and other contaminants that rob your engine of power out while also ridding the system of sludge and other harmful deposit buildups. This is accomplished with Pro Performance's all new magnesium detergent system that helps keep you better protected and responsive.

Pro Performance SuperPro Max Synthetic Blend exceeds the performance requirements of API's Resource Conserving "SN Plus" and car manufacturers' ILSAC GF-6 classification as well as all prior classifications providing the latest technology in fuel economy standards while also maintaining best in class wear control, cleanliness, protection against sludge, and oxidation control.

Pro Performance SuperPro Max SN Plus was developed in part to provide better vehicle performance as well as low speed pre-ignition (LSPI) protection, particularly for small displacement turbo-charged engines. High quality lubricants like Pro Performance SuperPro Max Synthetic Blend motor oil allow turbo-charged and Gasoline Direct Inject Engines (GDI) that experience LSPI to safely maintain their efficiency and fuel economy performance.

Specifications & Approvals

Pro Performance SuperPro Max Synthetic Blend exceeds all the following performance requirements or OEM specifications:

API SN-RC, SN Plus & all prior classifications	Chrysler MS-6395
ILSAC GF-6 & prior classifications	Fiat H2, M2, N2
	Ford WSS-M2C929-A
ACEA A5/B5-16	Ford WSS-M2C946-A

FEATURES

Low Speed Pre-Ignition (LSPI)

- Protection for small displacement turbo-charged GDI engines

Excellent Fuel Economy

- Drive an extra 580 miles per year on average
- "Resource Conserving" approved

Maximize Horsepower

- Protects engine components from wear leading to loss of power

Extreme Condition Performance


- Industry leading high temperature deposit control

Engine Cleanliness

- Up to 40% cleaner pistons than the industry standard
- Extremely low volatility providing extended drain protection

Maximum Protection

- Additive system imparts a layer of liquid Magnesium on critical engine components reducing sludge, varnish, rust, and corrosion

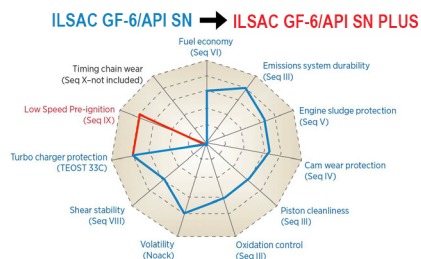

Super Pro Max Engine Oil provides exceptional protection and keeps engines cleaner for extended drain intervals in all operating environments.



Piston head after 10,000 miles

Damage from LSPI



Piston head after 45,000 miles

SuperPro Max protecting from LSPI



RAINBO OIL COMPANY.

Delivering Performance Every Day

1-800-942-4425

www.rainbolubes.com



TYPICAL PROPERTIES

Pro Performance SuperPro Max 5W-30 GF-6/SN PLUS, SN-RC

Product Code	409
SAE Grade	5W-30
Viscosity @ 40°C, cSt	60.1
Viscosity @ 100°C, cSt	10.2
Viscosity Index	158
Pour Point, °C	-48
HTHS @ 150°C	2.95
Flash Point, °C (COC)	234
NOACK Volatility	<13%

The above characteristics are typical of current production. While production will conform to Pro Performance's specification, slight variations may occur and do not affect performance.

Special Handling, Notices, or Warnings

Avoid contact with skin. Rinse with soap and water immediately after skin contact. This product is unlikely to present any significant health hazards. Dispose of used oil properly.



RAINBO OIL COMPANY.
Delivering Performance Every Day

1-800-942-4425
www.rainbolubes.com